

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2009

© COPYRIGHT - BY -


ALL RIGHTS RESERVED.

LOC
IK

DIST
2

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	L4	REVISED PER ECO-11-005150	03MAY11	RK	HMR

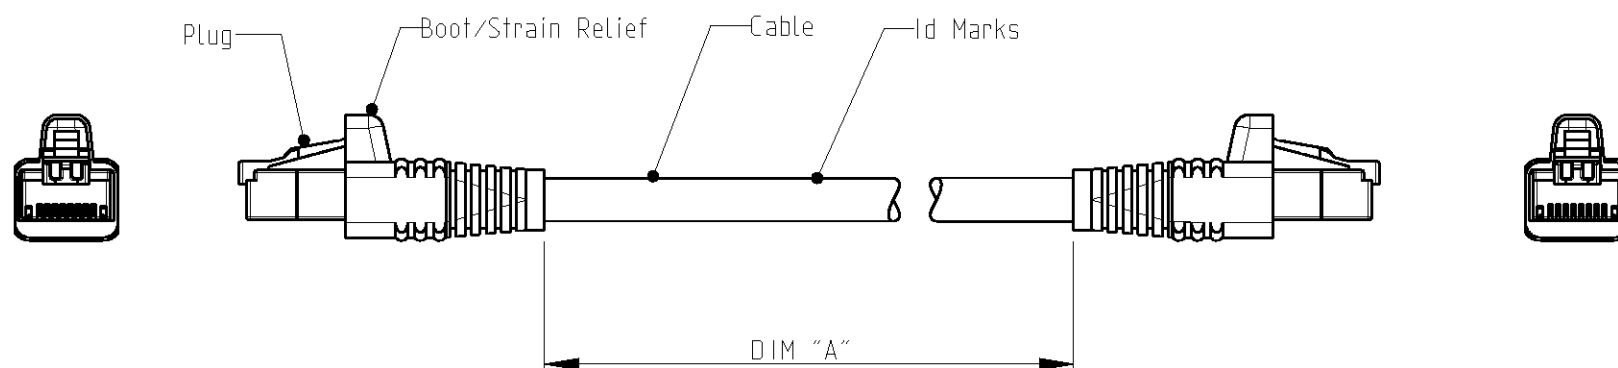

SCHEMATIC VIEW

1. RJ45 Cat.6 PATCH CABLE ASSEMBLIES ARE USED AS PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.

2. FOR AVAILABLE DASH LENGTHS, DIM A SEE THE TE CONNECTIVITY CATALOG

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		DWN J.GATNAU 03-Aug-09 CHK M.MAQUEDA 03-Aug-09 APVD J.SANABRA 03-Aug-09 PRODUCT SPEC 108-93010 APPLICATION SPEC - WEIGHT -			
MATERIAL - FINISH -		CUSTOMER DRAWING		NAME PATCH CORD RJ45 Cat.6 S/FTP PIMF600 LSZH STRANDED WHITE		SIZE A3 CAGE CODE - DRAWING NO C-959385 RESTRICTED TO -	
SCALE -				SHEET 1 OF 1		REV L4	