


# TrueNet®

## Series 2 Disconnection Module

Issue 4

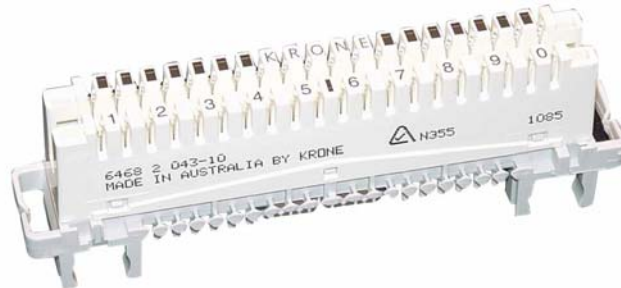

Disconnection module for ten incoming and ten outgoing pairs

### Features:

- Pairs numbered 1-0
- Disconnect contact used for opening the circuit
- Testing is possible in both directions
- Can accept 3 or 5 point overvoltage protection elements
- Includes one set of plug numbers 1-0 and 10-100
- 6468 5 043-10 – for mounting on Profil or Backmount frames
- 6468 5 043-13 – for mounting on Backmount frames only
- Modules come with side jumper rings

### Specifications

#### Mechanical:

Working temperature range:..... -20°C to +80°C  
Environment: ..... Indoors  
Insulation diameter: ..... 0.70-1.60mm  
Copper conductor diameter: ..... 0.40-0.80mm  
Multistrand Conductor:..... 7/0.2-7/0.32mm  
Number of equal diameter solid conductors per slot:..... 2 max (up to 0.65mm each)  
Number of equal diameter multistrand conductors per slot: ..... 1 max.  
Flammability rating of plastic housing: ..... UL 94 V0  
Contact material: ..... high strength spring copper alloy  
Contact plating: ..... silver plated

#### Electrical:

Insulation resistance: .....  $\geq 5 \times 10^4 M\Omega$   
Dielectric strength:  
    Adjacent contacts .....  $\geq 2000VAC$   
    Opposite contacts .....  $\geq 1800VAC$   
Current rating of LSA-PLUS® contact: ..... = Current carrying capacity  
    ..... of terminated conductor

SPEC SHEET



[adckrone.com/au](http://adckrone.com/au) • 1800 801 298 • [helpdesk.au@adckrone.com](mailto:helpdesk.au@adckrone.com)

# TrueNet®

## Series 2 Disconnection Module

Contact resistance: ..... ≤1mΩ typical  
 ..... ≤5mΩ guaranteed  
 Total contact resistance:..... ≤10mΩ  
 Number of re-terminations:..... ≥200  
 Coupling capacitance between wires: ..... ≤1pF

### Ordering Information

Description	Quantity	Colour	Product No.
Series 2 Disconnection Module, Profil and Backmount	Box of 10	White	6468 5 043-10
Series 2 Disconnection Module, Backmount only	Box of 10	White	6468 5 043-13

SPEC SHEET



**www.adckrone.com/au**  
 AUSTRALIA 2 Hereford Street, Berkeley Vale NSW 2261  
 Mailing Address: PO Box 335, Wyong NSW 2259, Australia  
 Sales Support: 1800 801 298

**www.adckrone.com/nz**  
 NEW ZEALAND 2 Nevis Street, Petone, Wellington  
 Mailing Address: PO Box 38-177, Wellington Mail Centre 6008, New Zealand  
 Sales Support: 0800 657 663

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101  
 Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

6468 5 043-10 & -13 / Issue 4 © 2008 ADC Telecommunications, Inc. All Rights Reserved.