



Passives Splitters


- die-cast housing
- connectors F type (center conductor diameter 0.5 ÷ 1.1 mm)

J-2SPLIT
2 way 1 GHz splitter

J-3SPLIT
3 way 1 GHz splitter

J-4SPLIT
4 way 1 GHz splitter

J-6SPLIT
6 way 1 GHz splitter

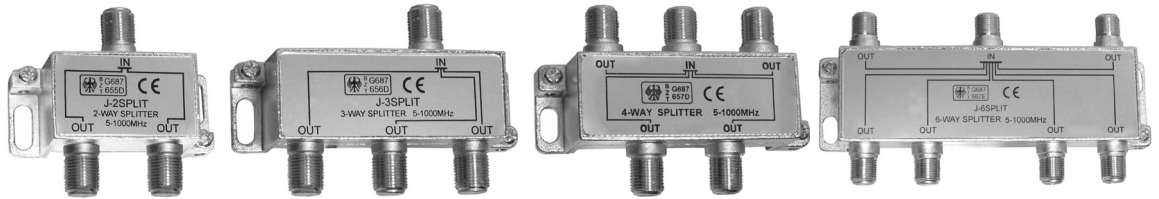

Technical specifications

T Y P E		J-2SPLIT	J-3SPLIT	J-4SPLIT	J-6SPLIT
Ordering number		00753	00755	00759	00754
Insertion loss (IN-OUT)	5-40 MHz	3.5 dB	5.6 dB	6.8 dB	9.0 dB
	40-470 MHz	3.7 dB	5.8 dB	7.0 dB	9.0 dB
	470-1000 MHz	4.0 dB	6.5 dB	8.0 dB	11 dB
Isolation (OUT-OUT)	5-40 MHz	30 dB	30 dB	30 dB	30 dB
	40-470 MHz	30 dB	30 dB	30 dB	28 dB
	470-1000 MHz	25 dB	25 dB	25 dB	25 dB
Return loss	5-40 MHz	22 dB	22 dB	22 dB	21 dB
	40-470 MHz	22 dB	22 dB	22 dB	20 dB
	470-1000 MHz	20 dB	18 dB	18 dB	18 dB

- die-cast housing
- connectors F type (center conductor diameter 0.5 ÷ 1.1 mm)

J-2SPLIT SAT
2 way 2.4 GHz splitter

J-3SPLIT SAT
3 way 2.4 GHz splitter

J-4SPLIT SAT
4 way 2.4 GHz splitter



Technical specifications

T Y P E		J-2SPLIT SAT*	J-3SPLIT SAT*	J-4SPLIT SAT*
Ordering number		00771	00757	00758
Insertion loss (IN-OUT)	5-40 MHz	4.0 dB	7.0 dB	8.0 dB
	40-1000 MHz	4.5 dB	8.0 dB	8.5 dB
	1000-2050 MHz	5.8 dB	10.0 dB	11.0 dB
	2050-2400 MHz	4.0 dB	7.0 dB	8.0 dB
Isolation (OUT-OUT)	5-40 MHz	14 dB	22 dB	23 dB
	40-1000 MHz	22 dB	22 dB	22 dB
	1000-2050 MHz	22 dB	20 dB	22 dB
	2050-2400 MHz	22 dB	20 dB	22 dB
Return loss	5-40 MHz	12 dB	10 dB	10 dB
	40-1000 MHz	15 dB	12 dB	12 dB
	1000-2050 MHz	14 dB	12 dB	12 dB
	2050-2400 MHz	12 dB	12 dB	12 dB

* DC pass from outputs to input