

Features

- Ultra High Efficiency (Up to 94%)
- High Power Factor (0.99 Typical)
- Constant Voltage of 300 W Continuous Output Power
- Lightning Protection
- All-Round Protection: OVP, OCP, SCP, OTP
- Waterproof (IP67)
- Comply With UL8750 & EN61347 Safety Regulations



Description

The EUV-300SxxxST Series operate from a 90 ~ 305 Vac input range. They are designed to be highly efficient and highly reliable. Features include lightning protection, over voltage protection, over current protection, short circuit protection and over temperature protection.

Models

Output Voltage	Input Voltage Range	Output Current Range	Max. Output Power	Typical Efficiency (1)	Power Factor		Model Number (2)
					110Vac	220Vac	
12 Vdc	90 ~ 305 Vac	0~22.9 A	275 W	91.5%	0.99	0.93	EUV-300S012ST
24 Vdc	90 ~ 305 Vac	0~12.5 A	300 W	91.0%	0.99	0.96	EUV-300S024ST★
28 Vdc	90 ~ 305 Vac	0~10.71A	300W	91.5%	0.99	0.96	EUV-300S028ST★
36 Vdc	90 ~ 305 Vac	0~8.33 A	300 W	92.0%	0.99	0.96	EUV-300S036ST
48 Vdc	90 ~ 305 Vac	0~6.25 A	300 W	93.5%	0.99	0.96	EUV-300S048ST
54 Vdc	90 ~ 305 Vac	0~5.55 A	300 W	94.0%	0.99	0.96	EUV-300S054ST

Notes: (1) Measured at full load and 220 Vac input.

(2) A suffix –xxx may be added to denote variations or modifications to the base product, where x can be any alphanumeric character or blank.

(3) ★: Popular model.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage Range	90 V	-	305 V	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 mA	At 277Vac 60Hz input
Input AC Current	-	-	3.3 A	Measured at full load and 100 Vac input.
	-	-	1.6 A	Measured at full load and 220 Vac input.
Inrush Current	-	-	50 A	At 230Vac input 25°C Cold Start

Specifications are subject to changes without notice.

Output Specifications

Parameter		Min.	Typ.	Max.	Notes
Output Voltage Tolerance		-5%	-	5%	
Ripple and Noise (pk-pk)		-	-	2% V_O	Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 μ F ceramic capacitor and a 10 μ F electrolytic capacitor.
Line Regulation		-	-	1%	
Load Regulation		-	-	3%	
Turn-on Delay Time		-	0.1 s	0.2 s	Measured at 110Vac input.
		-	0.1 s	0.2 s	Measured at 220Vac input.
Output Overshoot/ Undershoot		-	-	10%	When power on or off.
Load Dynamic Response	Output Deviation	-	-	5% V_O	R/S: 1 A / μ S Load: 25% ~ 75% full load.
	Settling Time	-	-	10 mS	

Note: All specifications are typical at 25 °C unless otherwise stated.

Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Voltage Protection $V_O = 12$ V $V_O = 24$ V $V_O = 28$ V $V_O = 36$ V $V_O = 48$ V $V_O = 54$ V	14 V 28 V 32 V 43 V 52 V 58 V	15 V 30 V 34 V 45 V 56 V 60 V	18 V 35 V 36 V 50 V 61 V 66 V	Latch mode. The power supply shall return to normal operation only after the power is turn-on again.
Over Current Protection	110% I_O	135% I_O	180% I_O	Hiccup mode. The power supply shall be self-recovery when the fault condition is removed.
Over Temperature Protection	-	110°C	-	Maximum temperature of components inside the case.
Short Circuit Protection	No damage shall occur when any output operating in a short circuit condition.			

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency $V_O = 12$ V $V_O = 24$ V $V_O = 28$ V $V_O = 36$ V $V_O = 48$ V $V_O = 54$ V	89.0%	89.5%	-	Measured at full load, 110Vac input, 25°C ambient temperature, after the unit is thermally stabilized.
	88.5%	89.0%	-	
	89.0%	89.5%	-	
	89.5%	90.0%	-	It will be lower about 1.5%, if measured immediately after startup.
	91.5%	92.0%	-	
	92.0%	92.5%	-	
Efficiency $V_O = 12$ V $V_O = 24$ V $V_O = 28$ V $V_O = 36$ V $V_O = 48$ V $V_O = 54$ V	91.0%	91.5%	-	Measured at full load, 220Vac input, 25°C ambient temperature, after the unit is thermally stabilized.
	90.5%	91.0%	-	
	91.0%	91.5%	-	
	91.5%	92.0%	-	It will be lower about 1.5%, if measured immediately after startup.
	93.0%	93.5%	-	
	93.5%	94.0%	-	

Specifications are subject to changes without notice.

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
No Load Power Dissipation			5 W	
MTBF	250,000 hours			Measured at 110Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Life Time	100,000 hours			Measured at 220Vac input, 80%Load ,Case temperature=70°C @ Tc point. See the life vs. Tc curve for the details
Dimensions Inches (L × W × H) Millimeters (L × W × H)	8.82 × 3.86 × 1.75 224 × 98 × 44.5			
Net Weight	-	1540 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Environmental Specifications



Parameter	Min.	Typ.	Max.	Notes
Operating Temperature	-35 °C	-	+70 °C	Humidity: 10% RH to 100% RH See Derating Curve for more details
Storage Temperature	-40 °C	-	+85 °C	Humidity: 5% RH to 100% RH

Safety & EMC Compliance


Safety Category	Standard
CUL	UL8750, UL935, UL1012, CSA-C22.2 No. 107.1
CE	EN 61347-1, EN61347-2-13
EMI Standards	Notes
EN 55015	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Specifications are subject to changes without notice.


Derating Curve

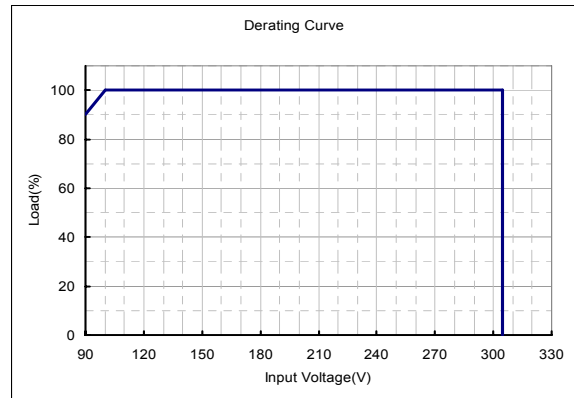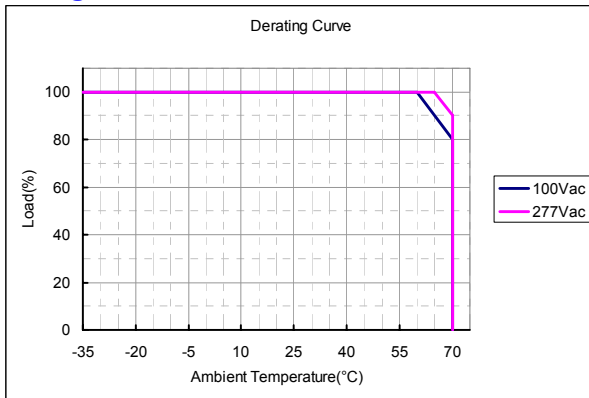


Life Time vs. Case Temperature Curve

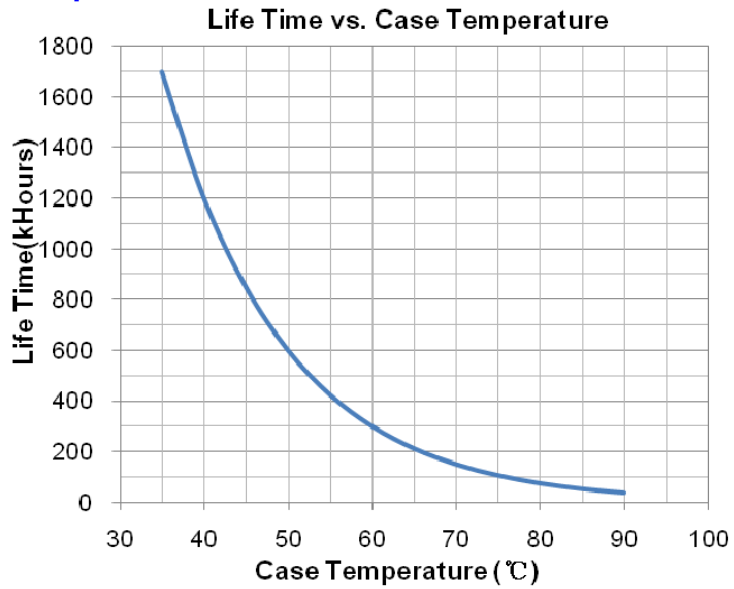


Mechanical Outline

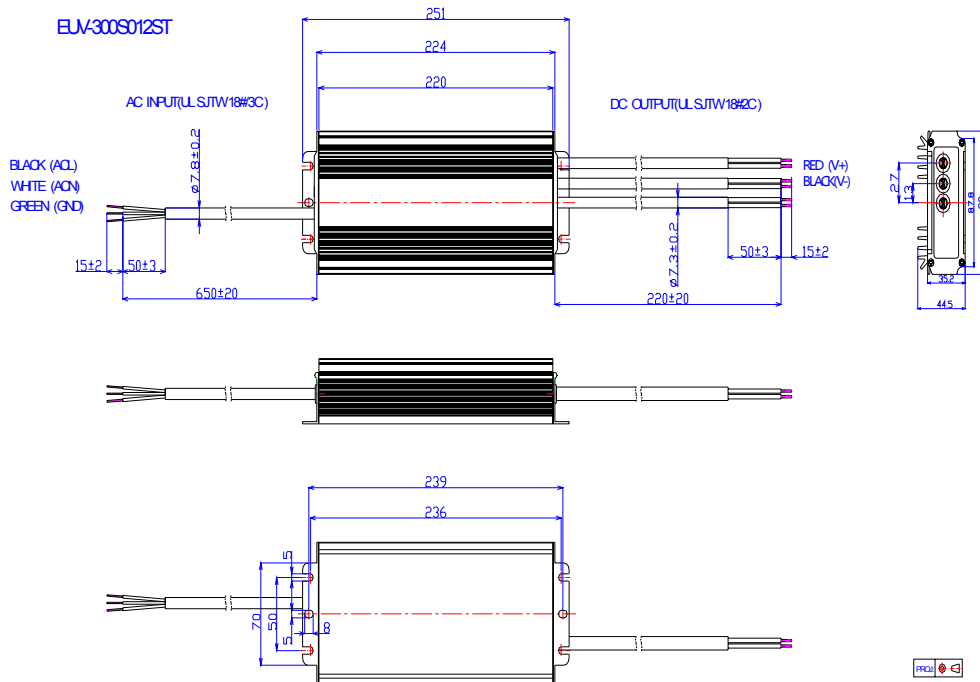

Note: The 3 DC output cables are connected in parallel internally because one AWG #18 wire can only carry 10A. Please connect the 3 red wires together and 3 black wires together in application, or ensure each cable carries same current.

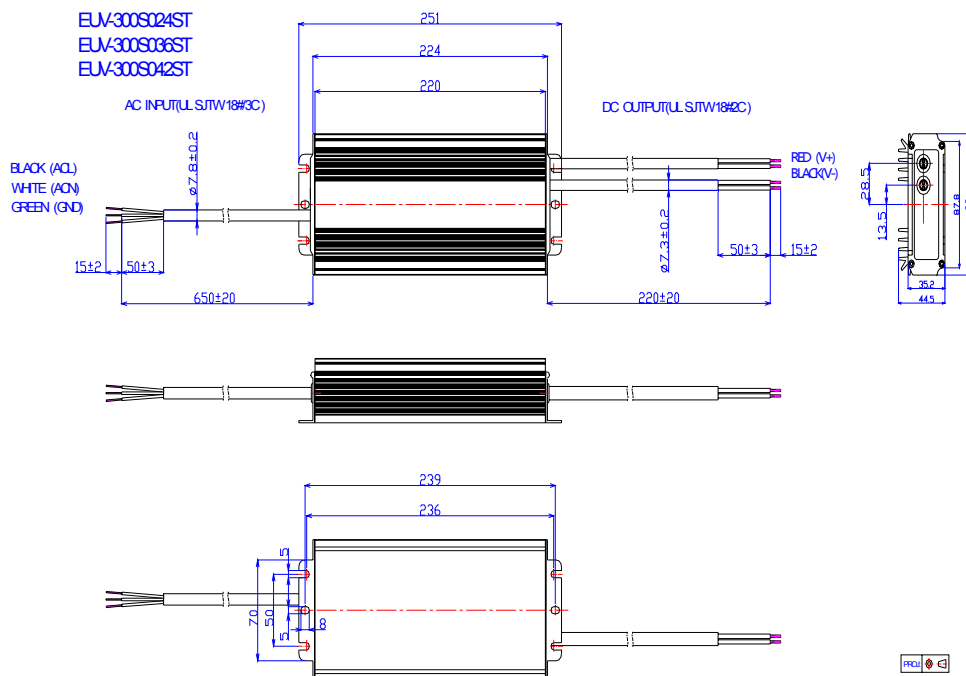

Note: The 2 DC output cables are connected in parallel internally because one AWG #18 wire can only carry 10A. Please connect the 2 red wires together and 2 black wires together in application, or ensure each cable carries same current.

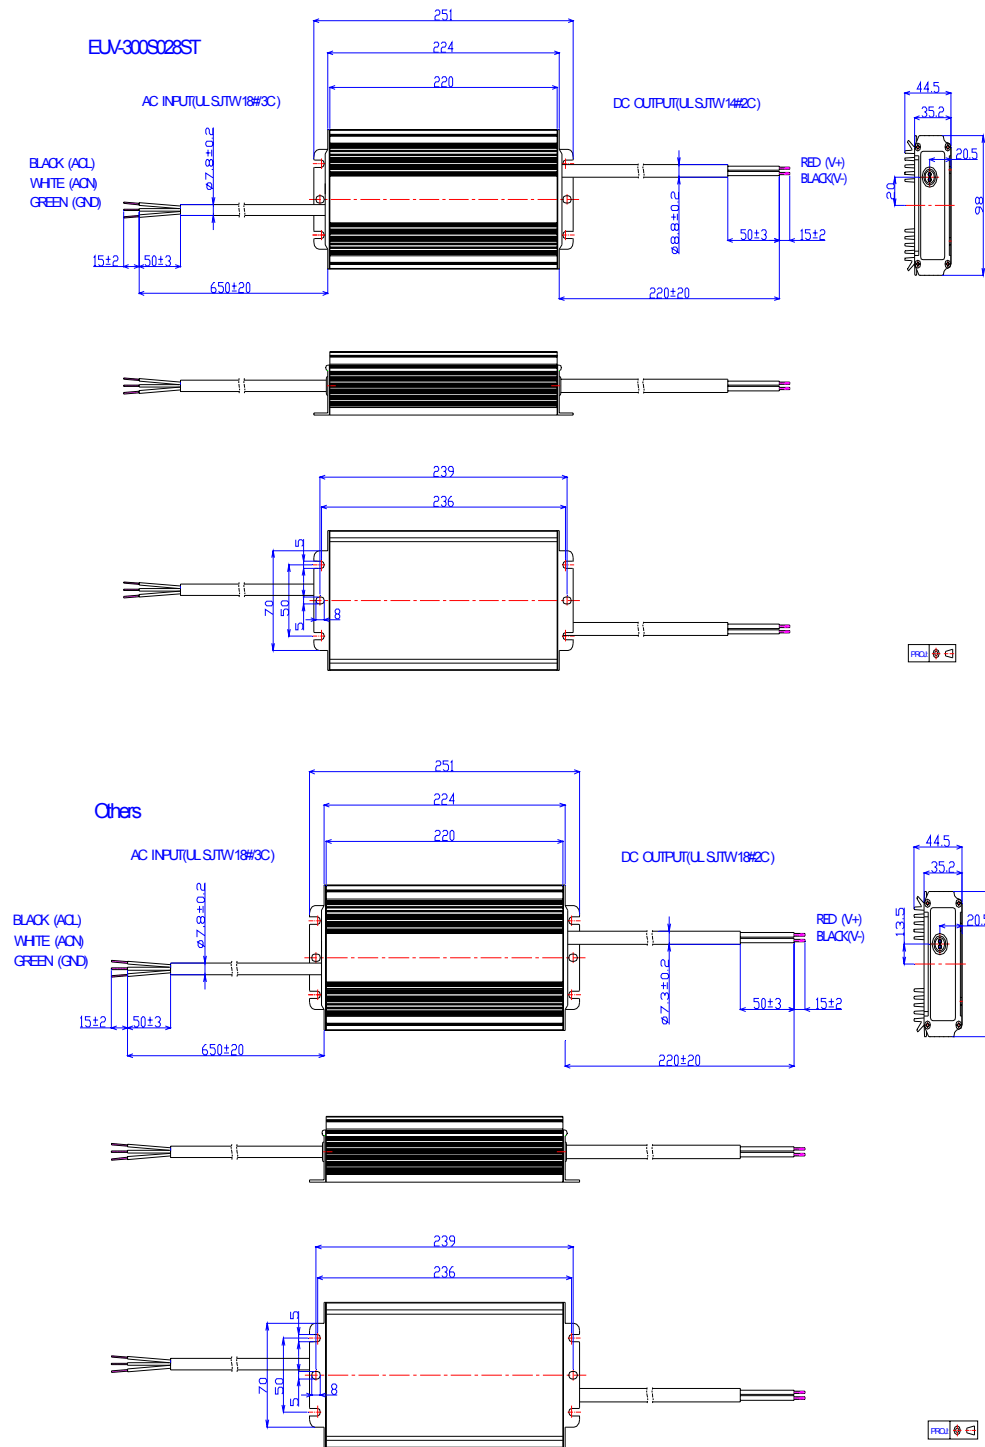

RoHS Compliance

Our products comply with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.

Specifications are subject to changes without notice.

Revision History

Change Date	Rev.	Description of Change																																							
		Item	From	To																																					
2009-10-15	A	Delete "UL1310 Class2" in Safety & EMC Compliance Change the efficiency of 12V.																																							
2009-10-23	B	Change the Max. Output Current and Power of 12V. Change the description of Short Circuit Protection																																							
2009-11-10	C	Change notes of efficiency.																																							
2009-12-04	D	Update Mechanical Outline.																																							
2009-12-16	E	Add note for mechanical outline.																																							
2010-03-11	F	Add a new model of 28V																																							
		Add Leakage Current in Input Specifications	/	Max. 0.75 Ma At 277Vac 50Hz input																																					
		Standardize the tolerance in Mechanical Outline	/	/																																					
2010-05-31	G	Add star rank for recommended model	/	☆: Popular model.																																					
2011-01-14	H	Update MTBF & Life Time Data	For One Model	For Two Models																																					
2011-07-20	I	MTBF	Delete 24V	Add 28V																																					
		Life	Use Tcase data to replace the old test condition																																						
2012-3-27	J	Notes of Life time	/	/																																					
2012-5-04	H	Typ. Efficiency @220 Vac																																							
		<table border="0"> <tr><td>V_o = 12 V</td><td>91.5%</td><td>91.5%</td></tr> <tr><td>V_o = 24 V</td><td>93.0%</td><td>91.0%</td></tr> <tr><td>V_o = 28 V</td><td>94.0%</td><td>91.5%</td></tr> <tr><td>V_o = 36 V</td><td>94.0%</td><td>92.0%</td></tr> <tr><td>V_o = 42 V</td><td>93.5%</td><td>93.0%</td></tr> <tr><td>V_o = 48 V</td><td>93.5%</td><td>93.5%</td></tr> <tr><td>V_o = 52 V</td><td>93.5%</td><td>93.5%</td></tr> <tr><td>V_o = 54 V</td><td>94.0%</td><td>94.0%</td></tr> <tr><td>V_o = 56 V</td><td>94.0%</td><td>94.0%</td></tr> <tr><td>V_o = 60 V</td><td>94.0%</td><td>94.0%</td></tr> <tr><td>V_o = 84 V</td><td>94.0%</td><td>94.0%</td></tr> <tr><td>V_o = 105 V</td><td>94.0%</td><td>94.0%</td></tr> <tr><td>V_o = 150 V</td><td>94.0%</td><td>94.0%</td></tr> </table>	V _o = 12 V	91.5%	91.5%	V _o = 24 V	93.0%	91.0%	V _o = 28 V	94.0%	91.5%	V _o = 36 V	94.0%	92.0%	V _o = 42 V	93.5%	93.0%	V _o = 48 V	93.5%	93.5%	V _o = 52 V	93.5%	93.5%	V _o = 54 V	94.0%	94.0%	V _o = 56 V	94.0%	94.0%	V _o = 60 V	94.0%	94.0%	V _o = 84 V	94.0%	94.0%	V _o = 105 V	94.0%	94.0%	V _o = 150 V	94.0%	94.0%
V _o = 12 V	91.5%	91.5%																																							
V _o = 24 V	93.0%	91.0%																																							
V _o = 28 V	94.0%	91.5%																																							
V _o = 36 V	94.0%	92.0%																																							
V _o = 42 V	93.5%	93.0%																																							
V _o = 48 V	93.5%	93.5%																																							
V _o = 52 V	93.5%	93.5%																																							
V _o = 54 V	94.0%	94.0%																																							
V _o = 56 V	94.0%	94.0%																																							
V _o = 60 V	94.0%	94.0%																																							
V _o = 84 V	94.0%	94.0%																																							
V _o = 105 V	94.0%	94.0%																																							
V _o = 150 V	94.0%	94.0%																																							
		Life time & MTBF	/	Corrected																																					
2012-06-13	I	Models		Deleted																																					
		<table border="0"> <tr><td>V_o = 42 V</td><td>/</td><td></td></tr> <tr><td>V_o = 52 V</td><td>/</td><td></td></tr> <tr><td>V_o = 56 V</td><td>/</td><td></td></tr> <tr><td>V_o = 60 V</td><td>/</td><td></td></tr> <tr><td>V_o = 84 V</td><td>/</td><td></td></tr> <tr><td>V_o = 105 V</td><td>/</td><td></td></tr> <tr><td>V_o = 150V</td><td>/</td><td></td></tr> </table>	V _o = 42 V	/		V _o = 52 V	/		V _o = 56 V	/		V _o = 60 V	/		V _o = 84 V	/		V _o = 105 V	/		V _o = 150V	/																			
		V _o = 42 V	/																																						
		V _o = 52 V	/																																						
V _o = 56 V	/																																								
V _o = 60 V	/																																								
V _o = 84 V	/																																								
V _o = 105 V	/																																								
V _o = 150V	/																																								
Life time curve	/	Added																																							
Mechanical Outline	/	Updated																																							
		EN61000-4-5	line to line 2 kV, line to earth 4 kV	line to line 4 kV, line to earth 6 kV																																					