

UL 2.8 - 6


6V 2.8AH

STANDBY


Ultracell®

'Quality in Every Language'


Charge Characteristic

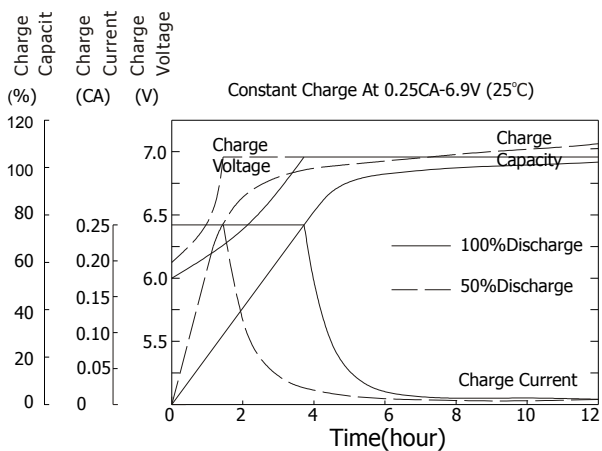


Discharge Characteristic 25°C

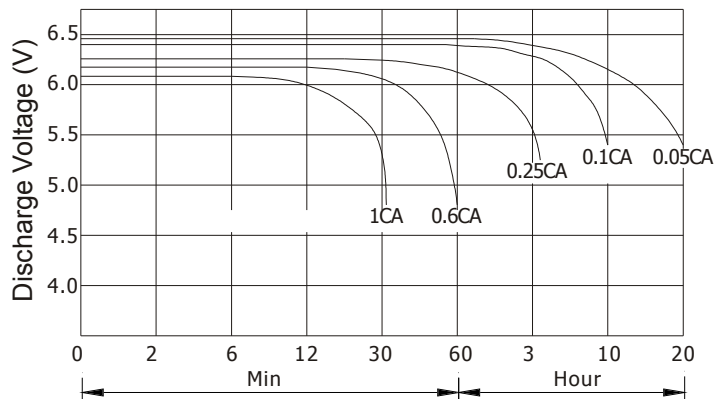

Relationship of OCV and state of charge

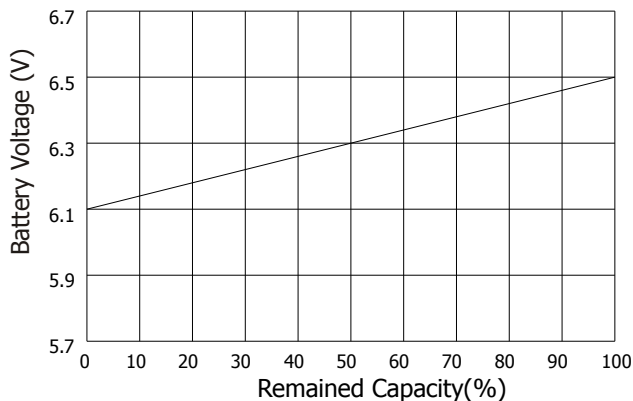

Self Discharge Characteristics

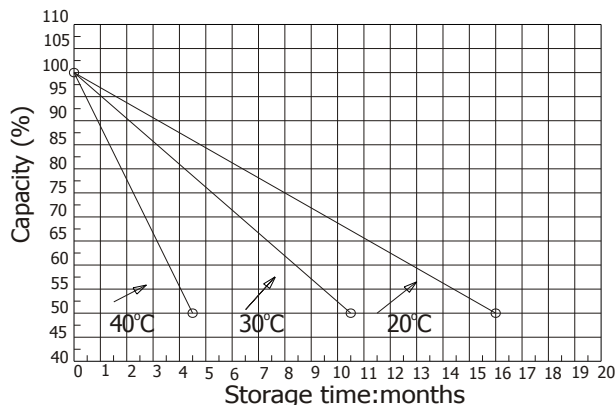

Constant Current Discharge Ratings - amperes at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	10.97	6.81	5.14	3.15	1.68	0.75	0.54	0.30	0.16
1.67 V	10.31	6.49	5.02	3.01	1.67	0.73	0.52	0.28	0.15
1.70 V	9.44	6.31	4.86	2.76	1.66	0.70	0.49	0.27	0.15
1.75 V	9.26	6.10	4.72	2.54	1.66	0.70	0.47	0.27	0.14
1.80 V	8.28	5.74	4.26	2.40	1.65	0.69	0.47	0.27	0.14
1.85 V	7.25	5.45	3.79	2.24	1.65	0.68	0.47	0.26	0.13

Constant Power Discharge Ratings - watts at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	20.20	13.98	10.66	6.48	3.46	1.56	0.96	0.55	0.31
1.67 V	19.90	13.95	10.60	6.42	3.44	1.54	0.95	0.55	0.30
1.70 V	19.48	13.88	9.89	6.38	3.41	1.53	0.95	0.54	0.30
1.75 V	19.15	13.80	9.85	6.27	3.37	1.47	0.94	0.54	0.30
1.80 V	17.43	12.56	9.32	6.12	3.34	1.44	0.93	0.53	0.29
1.85 V	15.80	12.35	9.28	5.89	3.32	1.42	0.93	0.53	0.29



CE 1188



MH 29410

Tel +44 (0) 151 523 2777
 Fax +44 (0) 151 523 0855
 E-mail info@ultracell.co.uk
 Web www.ultracell.co.uk