

# MP3 Y-Adapter

## Adapter von 3,5 mm Klinke auf Stereo-Audio

Mit der Cinch-Klinke-Kupplung lassen sich viele MP3-Player, Smartphones, Laptops und iPads an die HiFi-Anlage oder Mini-Lautsprecher anschließen. Dank mehrfacher Signalschirmung, reiner Materialien und präziser Verarbeitung ist die klanglich überzeugende Stereo Audioverbindung in Sekundenschnelle hergestellt.

- **Y-Cinch Stecker für die Verbindung mit HiFi-Anlagen/Verstärkern**
- **reine Kupferleiter und 2-fach Schirmung für klare Signalqualität**
- **24-Karat vergoldete Kontakte für minimale Übertragungswiderstände**

### Technische Daten


Anschlüsse	
Steckermaterial:	3-fach umspritztes PVC / ABS
Kontaktmaterial:	24-Karat-vergoldet
Schirmung:	ja
Anschluss 1, Typ:	3,5 mm KLINKE-Kupplung
Anschluss 1, Steckerlänge (mm):	39,8
Anschluss 1, Steckerbreite (mm):	14,0
Anschluss 1, Steckerhöhe (mm):	14,0
Anschluss 2, Typ:	2 x CINCH-Stecker (RCA)
Anschluss 2, Steckerlänge (mm):	39,8
Anschluss 2, Steckerbreite (mm):	14,0
Anschluss 2, Steckerhöhe (mm):	14,0
Kabel	
Typ:	Rundkabel
Länge (m):	0,14
Material Innenleiter:	OFC (sauerstofffreies Kupfer)
Durchmesser Innenleiter (mm):	25 x 0,120
AWG:	23
Anzahl Schirmungen:	2 x
Typ 1. Schirmung:	Aluminium-Folie
Typ 2. Schirmung:	Kupfer-Geflecht 42 Adern x 0,12 mm Querschnitt
Material Außenmantel:	hochelastisches PVC
Durchmesser Außenmantel (mm):	3,9
Knickschutz:	beidseitig
Signalübertragung	
Übertragungsarten:	analoge Audiosignale
Allgemein	
Betriebstemperatur von / bis (°C):	-10 / +80
Garantie (Jahre):	10

**clicktronic®**  
entertainment.  
pure.


casual




 3,5 mm KLINKE-Kupplung   2 x CINCH-Stecker (RCA)



### Kabelquerschnitt

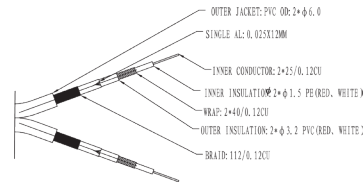

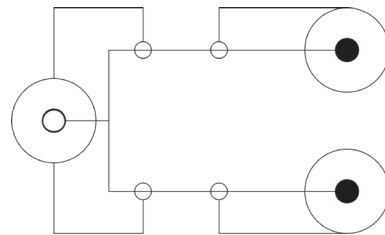

### Schaltplan



# MP3 Y-Adapter

0,1 m Adapter von 3,5 mm Klinke auf Stereo-Audio

**clicktronic**<sup>®</sup>  
entertainment.  
pure.

Artikelnr.	Kabellängen (m)	Verpackung (Maße in mm)	Gewicht (kg)	Abbildung	EAN Code
70493	0.14	Einzelkarton: 80 x 75 x 30 Export VPE (80 Stk.): 370 x 345 x 235	Einzelkarton: 0.04 Export VPE: 4.80		 4 040849 704932

TARIC-Code: 85444290900

Bei Clicktronic<sup>®</sup> werden alle Kabel oberhalb einer Länge von 7,5 Metern gemäß der Testkriterien als Standard HDMI<sup>™</sup>-Kabel bezeichnet, auch wenn sie ursprünglich als High Speed HDMI<sup>™</sup>-Kabel ausgelegt wurden und ggf. auch über größere Distanzen eine deutliche Mehrleistung zeigen.

Alle enthaltenen Firmennamen und Produktbezeichnungen sind Warenzeichen der jeweiligen Inhaber. Alle Rechte vorbehalten. Bei HDMI<sup>™</sup> handelt es sich um eine eingetragene Marke der HDMI Licensing L.L.C.

Der Inhalt kann von den Abbildungen abweichen. Druckfehler und Änderungen an Produkt, Verpackung oder Dokumentation behalten wir uns vor.  
Clicktronic<sup>®</sup>, Pillmannstraße 12, D-38112 Braunschweig

# MP3 Y-adaptor

## coupling of 3.5 mm jack to stereo audio

The cinch-jack coupling allows to connect many MP3 Players, Smartphones, Laptops, and iPads to the HiFi system, or mini speakers. Due to multiple signal shielding, pure materials, and precise workmanship the sonically convincing stereo audio connection is established within seconds.

- Y-cinch plug for connection to HiFi systems/amplifiers
- pure copper conductor and 2-way shielding for clear signal quality
- 24-Karat gold plated contacts for minimum transfer resistances

### Specifications

#### Connections

Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	3.5 mm STEREO jack
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	2 x RCA plug (RCA)
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

#### cable

Type:	Round cable
Length (m):	0.14
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	25 x 0.120
AWG:	23
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil
Type of 2nd shielding	Copper braid 42 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	3.9
Kink protection:	on both sides

#### Signal transmission

Transmission modes:	analog audio signals
---------------------	----------------------

#### General

Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10

# clicktronic®

entertainment.  
pure.


casual




3.5 mm STEREO jack




2 x RCA plug (RCA)



#### Cross section

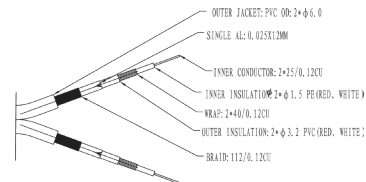

#### Wiring diagram

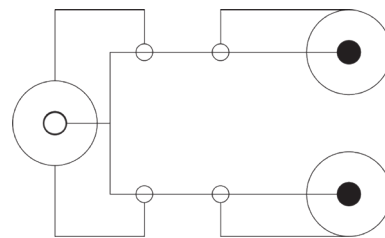

Designed in  
Germany

**10** Years  
Warranty  
High-Quality  
Assurance



**OFC**  
99.99% Oxygen  
Free Copper

**24** Carat  
Gold  
Anti Resistance  
Connections

**2x**  
Cable  
Shielding

# MP3 Y-adaptor

coupling of 3.5 mm jack to stereo audio

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70493	0.14	Single carton: 80 x 75 x 30 Master cartons (80 pcs.): 370 x 345 x 235	Single carton: 0.04 Master carton: 4.80		 4 040849 704932

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany