


# NPC6ASZDB-WT

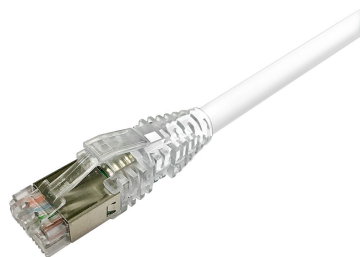

NPC RJ45 Patch Cord, category 6A, S/FTP, LSZH, white

- High-performance patch cords exceeding industry standards supporting NETCONNECT channel specifications
- Standardized transparent, slim-line boots provides consistent patch cord appearance and supports highest density applications
- Colored clips are available to fit the transparent boot, eliminating the need of multiple colors for matching every jacket color
- Colored pull latch tabs are available for easier plug release handling from the modular jack

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA
Portfolio	NETCONNECT®
Product Type	Twisted pair patch cord
Product Series	NPC

## General Specifications

ANSI/TIA Category	6A
Cable Type	S/FTP (shielded)
Conductor Type	Stranded
Interface Feature, connector A	Standard
Interface Feature, connector B	Standard
Interface, Connector A	RJ45 plug
Interface, Connector B	RJ45 plug
Jacket Color	White
Pairs, quantity	4
Wiring	T568B

## Dimensions

Cable Assembly Length, metric, minimum	1 m   3.281 ft
Cable Assembly Length, metric, maximum	100 m   328.084 ft
Diameter Over Jacket	5.9 mm   0.232 in
Compatible Conductor Gauge, stranded	26 AWG

## Mechanical Specifications

Plug Insertion Life, minimum	750 times
------------------------------	-----------

# NPC6ASZDB-WT

## Environmental Specifications

Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Relative Humidity	Up to 93%, non-condensing
Environmental Space	Low Smoke Zero Halogen (LSZH)
Safety Standard	UL 1863

## Packaging and Weights

Packaging quantity	1
--------------------	---

## Regulatory Compliance/Certifications

Agency	Classification
RCM	Compliant to electrical safety, EMC, EME & telecommunications requirements



## Included Products

- 2 8 4 3 0 3 2 - 3**  
**MP-Boot-S/SL-AB** — Modular Plug Shielded Slim-Line Boot for Category 6A/6 and Category 5e EMT Plugs, 4.7 to 6.0 mm, transparent
- 6 - 2 1 1 1 9 8 1 - 3**  
**MP-6AS-B-1** — Modular Plug Kit, category 6A, shielded, 8-position, 5.1 – 6.0 mm max cable jack OD, 100/bag