


# AM4115T-CFVW



The Dino-Lite AM4115T-CFVW digital microscope is optimized for research and viewing fluorescent objects by using 400nm near UV excitation LEDs. It has a long-pass type 430nm emission filter that is designed to observe a wide range of fluorophores with applications in developmental biology, pathology, and anatomy.

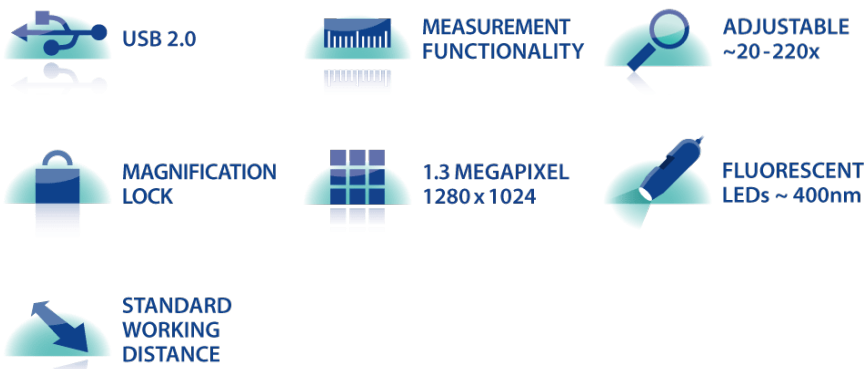

The AM4115T-CFVW has the capability of switching the light source from the 400nm near UV excitation LEDs to the white LED, which is convenient for locating the object and obtaining an easy focus. All of these factors make the AM4115T-CFVW the smallest fluorescence microscope in the world, capable of many applications and visualizing a vast range of fluorescence.

» *Special models available on request.*

## Additional Info

- Dino-Lite Range: Dino-Lite Special lighting
- Resolution: Medium (800x600 - 1.3 Megapixel)
- Magnification: Standard (10x - 220x)

- Interface: USB 2.0
- Working Distance: Standard
- Price Range (excl. VAT): €550,00 - €750,00
- Light/ LED type: 400nm excitation + white
- ESD Safe: No
- Polarizer: No
- Housing: Composite/plastic housing
- Special feature: No
- Fluorophores: DAPI
- Dino-Lite Range: Dino-Lite Special lighting
- Light/ LED type: 400nm excitation + white
- Number of LEDs: 7 FL + 1 White
- LED on/off switchable: Yes
- Infrared filter: No
- Diffuser available: No
- Emission filter: 430nm, LP
- Fluorophores: DAPI
- Polarizer: No
- Magnification: 20-220x
- Macro zoom: No
- Working Distance: Standard
- Resolution: 1.3 Megapixel (1280x1024)
- Maximum Frame rate: 30 fps
- Interface: USB 2.0
- Housing material: Composite/ plastic housing
- Magnification lock: Yes
- Measurement: Yes
- Calibration: Yes
- Microtouch sensor: Yes
- ESD Safe: No
- Special feature: No
- Package contents: Microscope, Carry pouch, Software CD, Calibration target, User manual
- Price Range: €550,00 - €750,00

- **Details**

- Dino-Lite range: Dino-Lite Special lighting

- **Lighting**

- Light/ LED type: 400nm excitation + white
- Number of LEDs: 7 FL + 1 White
- LED on/off switchable: Yes
- Infrared filter: No
- Diffuser available: No
- Emission filter: 430nm, LP
- Fluorophores: DAPI
- Polarizer: No

- **Optics**

- Magnification: 20-220x
- Macro zoom: No
- Working distance: Standard
- Lens type: Glass with anti-reflection coating

- **Sensor**

- Sensor type: CMOS
- Resolution: 1.3 Megapixel (1280x1024)
- Maximum frame rate: 30 fps

- **Compatibility**

- Interface: USB 2.0
- Operating system: Windows XP, Vista, 7, 8 & 10, MacOS 10.9 and up
- Included software: DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
- Supported image formats (Windows): BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
- Supported video formats (Windows): WMV, FLV, SWF
- Supported image formats (MacOS): JPEG, PNG
- Supported video formats (MacOS): MOV
- Imaging standards: DirectShow, UVC

- **Housing**

- Housing material: Composite/ plastic housing
- Magnification lock: Yes
- Dimensions: 10.5cm (L) x 3.2cm (D)
- Weight: 105g
- Cable length: 1.8m

- **Features**

- Special feature: No
- Measurement: Yes
- Calibration: Yes
- Microtouch sensor: Yes
- ESD safe: No

- **Information**

- Package contents: Microscope, Carry pouch, Software CD, Calibration target, User manual
- Warranty information: 2 years European warranty
- Regulatory approval: CE, FCC, ROHS
- Price range: €550,00 - €750,00
- Working distance/ field of view/ depth of field:


Magnification Rate	Working Distance 1	Working Distance 2*	Field of View(x)	Field of View(y)	Depth of Field
20	52.7	60.2	19.5	15.6	2.5
30	26.0	33.5	13.0	10.4	1.8
40	13.4	20.9	9.8	7.8	1.5
50	6.4	13.9	7.8	6.3	-
60	2.2	9.7	6.5	5.2	-
70	-	7.1	5.6	4.5	1.0
80	-	5.5	4.9	3.9	-
90	-	4.5	4.3	3.5	-
100	-	4.1	3.9	3.1	-
110	-	4.0	3.6	2.8	-
120	-	4.1	3.3	2.6	-
130	-	4.5	3.0	2.4	-
140	-	5.0	2.8	2.2	-
150	-	5.6	2.6	2.1	-
160	-	6.3	2.4	2.0	-
170	-	7.1	2.3	1.8	-
180	-	8.0	2.2	1.7	-
190	-	8.9	2.1	1.6	-
200	-	9.9	2.0	1.6	-
210	-	10.9	1.9	1.5	-
220	-	11.9	1.8	1.4	0.1

Listed values may differ slightly

\* Without front cap

Unit = mm

- Special Light:

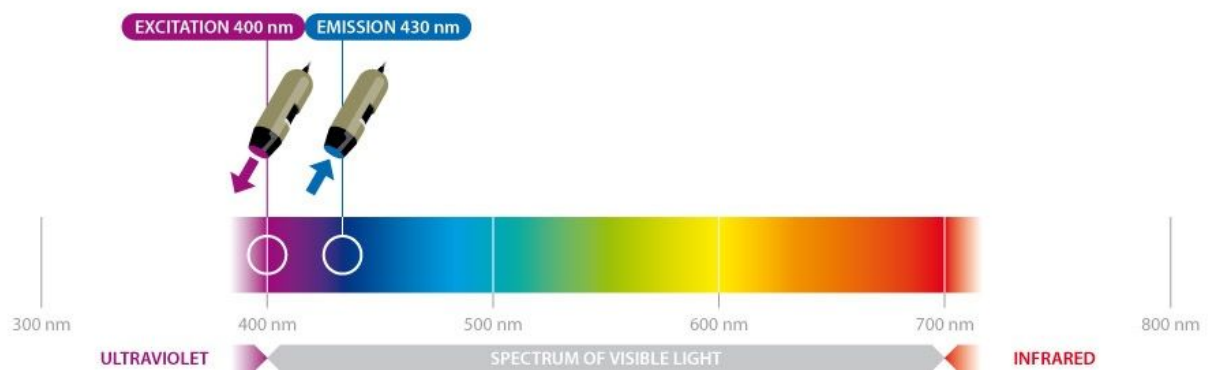

PDF generated on: 23-05-2018