


# AM4115T-DFRW



The Dino-Lite AM4115T-DFRW digital microscope is optimized for research and viewing fluorescent objects by using 620nm excitation LEDs. It has a long-pass type 650nm emission filter that is designed to observe a wide range of fluorophores with applications in developmental biology, pathology, and anatomy.

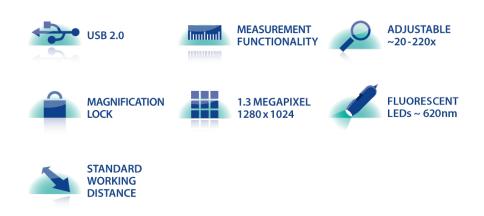

The AM4115T-DFRW has the capability of switching the light source from the 620nm excitation LEDs to the white LED, which is convenient for locating the object and obtaining an easy focus. All of these factors make the AM4115T-DFRW the smallest fluorescence microscope in the world, capable of many applications and visualizing a vast range of fluorescence.

» Special models available on request.

# **Additional Info**

- Dino-Lite Range: Dino-Lite Special lighting
- Resolution: Medium (800x600 1.3 Megapixel)
- Magnification: Standard (10x 220x)



• Interface: USB 2.0

• Working Distance: Standard

Price Range (excl. VAT): €550,00 - €750,00
Light/ LED type: 620nm excitation + white

ESD Safe: NoPolarizer: No

• Housing: Composite/plastic housing

Special feature: NoFluorphores: Cy5

Dino-Lite Range: Dino-Lite Special lighting
Light/ LED type: 620nm excitation + white

• Number of LEDs: 7 FL + 1 White

• LED on/off switchable: Yes

Infrared filter: NoDiffuser available: NoEmission filter: 650nm, LP

• Fluorophores: Cy5

• Polarizer: No

• Magnification: 20-220x

• Macro zoom: No

• Working Distance: Standard

• Resolution: 1.3 Megapixel (1280x1024)

• Maximum Frame rate: 30 fps

• Interface: USB 2.0

• Housing material: Composite/ plastic housing

Magnification lock: YesMeasurement: Yes

• Calibration: Yes

· Microtouch sensor: Yes

• ESD Safe: No

• Special feature: No

• Package contents: Microscope, Carry pouch, Software CD, Calibration target, User manual

• Price Range: €550,00 - €750,00

### Details

• Dino-Lite range: Dino-Lite Special lighting

## Lighting

• Light/ LED type: 620nm excitation + white

• Number of LEDs: 7 FL + 1 White

• LED on/off switchable: Yes

Infrared filter: NoDiffuser available: NoEmission filter: 650nm, LP

• Fluorophores: Cy5

• Polarizer: No



## Optics

• Magnification: 20-220x

• Macro zoom: No

Working distance: Standard

· Lens type: Glass with anti-reflection coating

#### Sensor

• Sensor type: CMOS

• Resolution: 1.3 Megapixel (1280x1024)

• Maximum frame rate: 30 fps

## Compatibility

• Interface: USB 2.0

• Operating system: Windows XP, Vista, 7, 8 & 10, MacOS 10.9 and up

• Included software: DinoCapture 2.0 (Windows), DinoXcope (Mac OS)

• Supported image formats (Windows): BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX

• Supported video formats (Windows): WMV, FLV, SWF

• Supported image formats (MacOS): JPEG, PNG

• Supported video formats (MacOS): MOV

• Imaging standards: DirectShow, UVC

## Housing

Housing material: Composite/ plastic housing

Magnification lock: Yes

• Dimensions: 10.5cm (L) x 3.2cm (D)

Weight: 105gCable length: 1.8m

## Features

Special feature: NoMeasurement: YesCalibration: Yes

• Microtouch sensor: Yes

• ESD safe: No

## Information

• Package contents: Microscope, Carry pouch, Software CD, Calibration target, User manual

• Warranty information: 2 years European warranty

• Regulatory approval: CE, FCC, ROHS


• Price range: €550,00 - €750,00

• Working distance/ field of view/ depth of field:



Magnification Rate	Working Distance 1	Working Distance 2*	Field of View(x)	Field of View(y)	Depth of Field
20	52.7	60.2	19.5	15.6	2.5
30	26.0	33.5	13.0	10.4	1.8
40	13.4	20.9	9.8	7.8	1.5
50	6.4	13.9	7.8	6.3	-
60	2.2	9.7	6.5	5.2	-
70	-	7.1	5.6	4.5	1.0
80	-	5.5	4.9	3.9	-
90	-	4.5	4.3	3.5	-
100	-	4.1	3.9	3.1	-
110	-	4.0	3.6	2.8	-
120	-	4.1	3.3	2.6	-
130	-	4.5	3.0	2.4	-
140	-	5.0	2.8	2.2	-
150	-	5.6	2.6	2.1	-
160	-	6.3	2.4	2.0	-
170	-	7.1	2.3	1.8	-
180	-	8.0	2.2	1.7	-
190	-	8.9	2.1	1.6	-
200	-	9.9	2.0	1.6	-
210	-	10.9	1.9	1.5	-
220	-	11.9	1.8	1.4	0.1
Listed values may differ slightly		* Without front cap			Unit = mm

• Special Light:

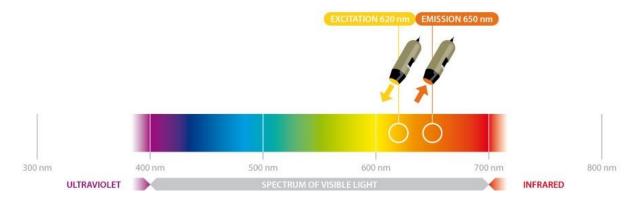

PDF generated on: 23-05-2018