

TRB140

LTE GATEWAY BOARD

Industrial LTE Cat 4 Gateway Board TRB140 is equipped with a single Ethernet port, Digital Inputs/Outputs and a micro-USB port. TRB140 compact design makes this Gateway perfect for an application where a sole gadget must be granted reliable Internet connectivity. TRB140 is engineered to be used in Industrial applications, therefore, it has a wide range of software features such as SMS control, Firewall, OpenVPN, IPsec, RMS and FOTA support.



Ethernet interface

9-30V

Wide range of power supply voltages



LTE Cat 4 with speeds up to 150 Mbps



Teltonika Remote Management System compatible



Compact size, easy integration

RutOS

Easy to use, secure and feature rich OpenWrt based Operating System



EFFICIENT


- Easy Integration
- Compact size
- Low Power consumption

ADVANCED

- LTE Cat 4
- High Performance
- Open platform with SDK

SECURE

- OpenVPN and IPsec
- Embedded Firewall
- Encrypted management with Remote Management System

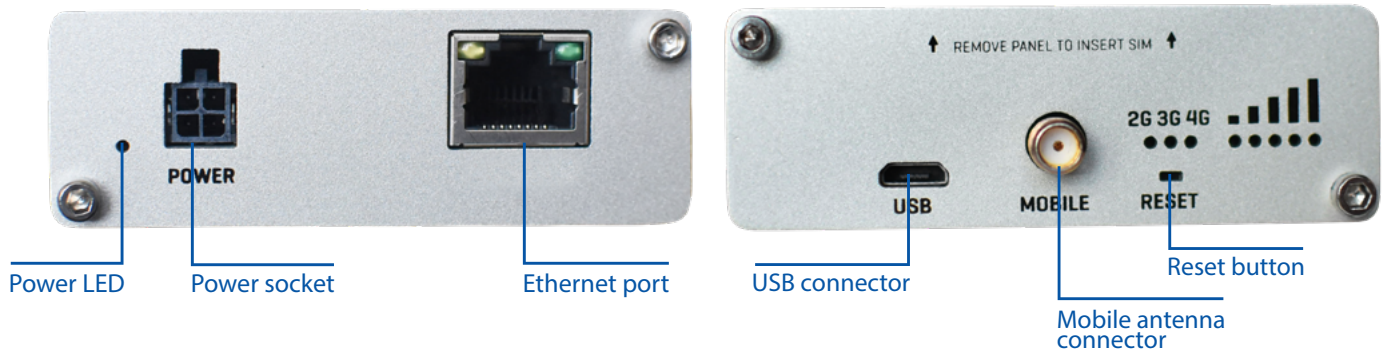

Hardware

Mobile	LTE (Cat4)/3G/2G
SIM slot	Mini SIM (2FF)
Antenna connector	1 x SMA for LTE
Ethernet	1 x 10/100/1000 Mbps
Input/Output	2 x Digital Input/Output (configurable)
CPU	ARM Cortex-A7 1.2 GHz CPU
RAM	128 MB (50 MB available for userspace)
Flash	512 MB (200 MB available for userspace)
Input voltage range	9 - 30 VDC
Power connector	4 pin industrial DC power socket
PoE (passive)	Passive PoE over spare pairs. Possibility to power up through LAN port, not compatible with IEEE802.3af and 802.3at standards
Configuration interface	Virtual NIC via Micro-USB connector
LED Indicators	Power, signal, network and data status LEDs
Operating temperature	-40° C to 75° C
Dimensions	60 mm x 70 mm x 18 mm
Weight	134 g

Software

Operating system	RutOS (OpenLinux based Linux OS)
Network	NAT, Firewall (port forward, traffic rules, custom rules), DDNS (>25 service providers supported)
Remote management	RMS Support, FOTA support, SSH, CLI, SMS Utilities (status/configuration)
Status watchdogs	Ping reboot, periodic reboot
Additional features	Internet connectivity over USB virtual network interface

